


# Wraptite-FZ

AIRTIGHTNESS

## WHY CHOOSE WRAPTITE-FZ?

Wraptite-FZ is a vapour permeable airtight membrane for use at floor junctions. It is durable, flexible and lightweight, and offers temporary protection against wind driven rain, snow and dust. Wraptite-FZ conforms to the Construction Products Directive and is manufactured under control of an ISO9001 quality management system.

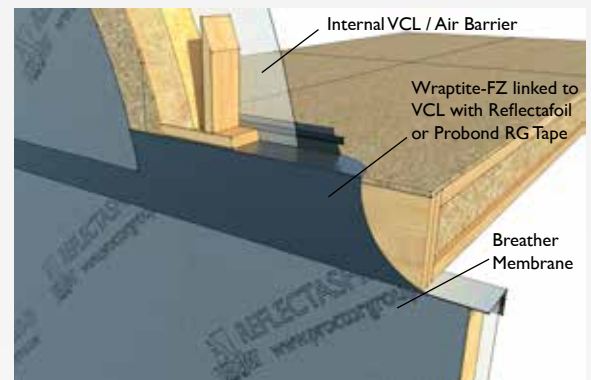

Cassette Floor Junction

## PRODUCT CHARACTERISTICS

PROPERTY	TEST/STANDARD		RESULT	
Roll size			1m x 50m 750mm x 50m	
Product Code			FNS 170	
Mass per unit area	EN 1849-2		170g/m <sup>2</sup>	
Reaction to fire	EN 13501-1		Class D, d2*	
Water vapour resistance Sd	EN ISO 12572		0.029 m	
Water penetration	EN 1928	Before ageing: After ageing:	Class W1 Class W1	
Tensile strength	EN 12311-1	Before ageing: After ageing:	MD 400 N MD ≥50%	CD 260 N CD ≥50%
Elongation	EN 12311-1	Before ageing: After ageing:	MD 80% MD ≥50%	CD 100% CD ≥50%
Tear resistance	EN 12310-1		MD 190 N	CD 190 N
Flexibility at low temperature	EN 1109		No cracking at minus 60°C	

\*When tested to EN 11925-2


 Insert Code  
**136**

November 2018



Download a full Wraptite  
brochure from our website...

[www.proctorgroup.com](http://www.proctorgroup.com)

wraptite@proctorgroup.com | +44 (0) 1250 872261

**Proctor**  
Group